

HSF



SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHAM02 - X - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
 06 08 10 14 16
 20 24 26 30 32
 34 40 44 50 60
 64 80 100

③ Contact Plating:

G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin

④ Color Insulator

B:Black
 U:Blue
 W:White

⑤ Insulator Material

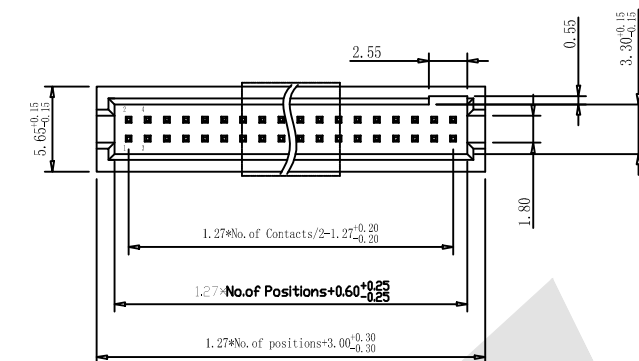
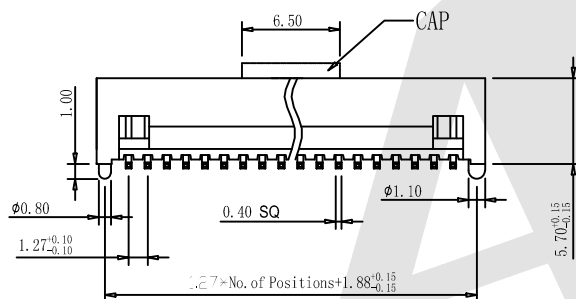
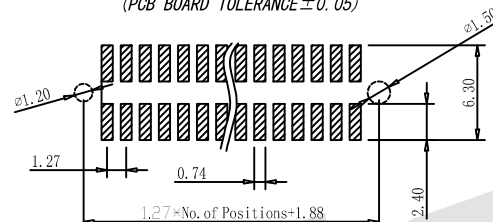
B:PA6T
 C:LCP
 E:PA9T

⑥ Packing

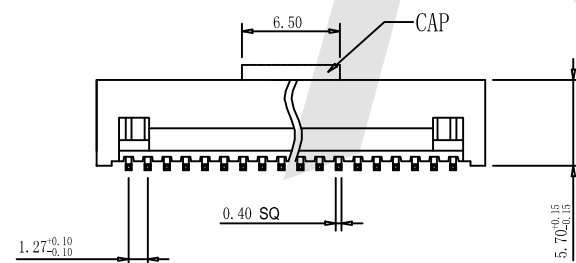

A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

⑦ With locating pegs option


A:Type A without pegs
 B:Type B with pegs

Recommended P. C. B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Type B




Type A



Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

3rd ANGLE PROJECTION

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:

1.27mm Box Header SMT H=5.70 With or Without post

DRAWING NO:

BHAM02-XXXXXXX

PRODUCT NO:

BHAM02-XXXXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8