



HSF


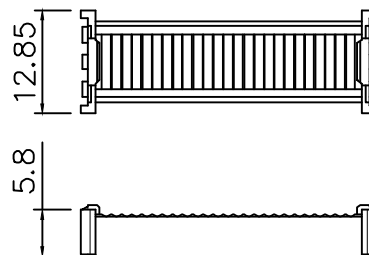


ROHS

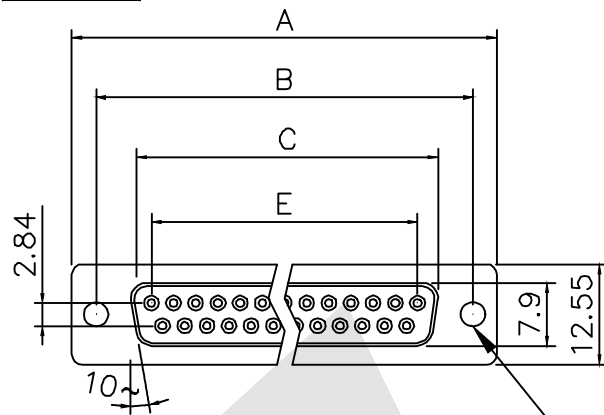

COVER

Ø3.05 CLEAR HOLE

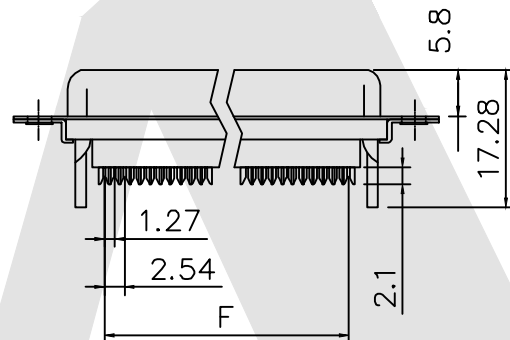

WITHOUT INSULATOR SUPPORT

Positions	A	B	C	E	F
9Pin	30.81	24.99	16.33	11.08	10.16
15Pin	39.20	33.30	24.70	19.39	17.78
25Pin	53.05	47.04	38.40	33.24	30.48
37Pin	69.40	63.50	54.80	49.86	45.72

SPECIFICATIONS:

1. Electrical Characteristic:

- 1.1 Current rating: 3 AMP
- 1.2 Voltage rating: 250V AC/RMS 60HZ
- 1.3 Contact resistance: 20 milliohms
- 1.4 Insulation resistance: 1000 megohms at 500V DC
- 1.5 Dielectric withstanding voltage: 1000V AC/RMS 60HZ For 1 minute

2. Material:

- 2.1 Insulator: Glass-filled thermoplastic PBT, UL94V-0
- 2.2 Contact: Copper alloy
- 2.3 Shell: Steel, 80u" nickel over 50u" min copper

Ordering Code:

DIDC03 - F - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Dual Row IDC Type

② Contact Type:
F: Female③ Contact NO.:
09=09pin 15=15pin
25=25pin 37=37pin④ Contact Plating
S: Selective Gold
S1: Selective 3u" Gold
S2: Selective 5u" Gold
S3: Selective 10u" Gold
S4: Selective 15u" Gold
S5: Selective 30u" Gold

⑤ Color Code:

L: Blue
B: Black

⑥ Other Option:

A: With S/R (Standard)
B: Without S/R

⑦ Mounting Option:

Blank - Without mounting
Hardware
K - With Riveted Threaded
#4-40 Bushing

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Lv Xun Hua DATE 07/03/2019

CHECK BobYang DATE 07/03/2019



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: D-SUB Female Dual Row IDC Type
(Slim Type)

DRAWING NO: DIDC03-FXXXXX

PRODUCT NO: DIDC03-FXXXXX

Revised order code number option 7

10/01/2022

REV

DESCRIPTION

DATE