




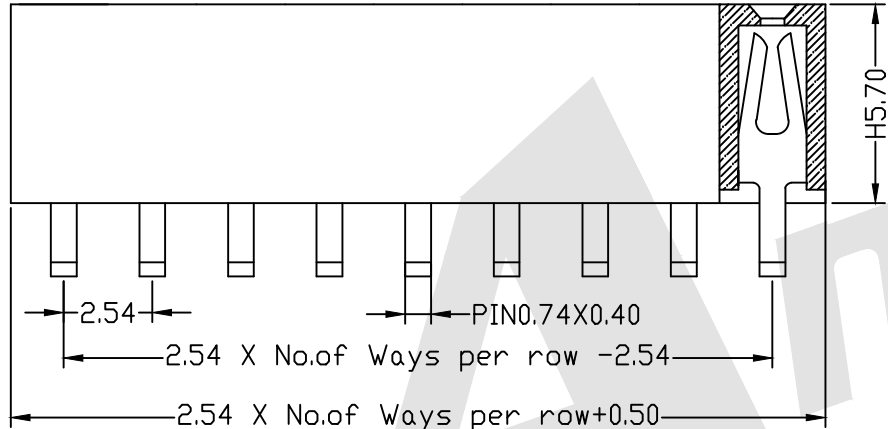

SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

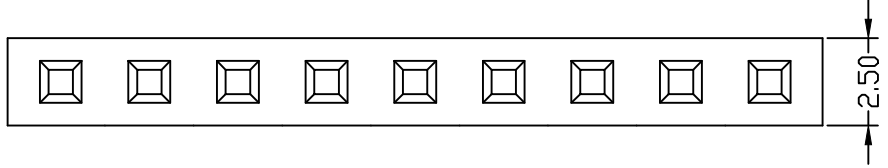


Ordering Code:

FHER02 - X - X - S - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 01 To 40
- ③ Contact Plating: G0:Gold flash S0:Selective G1:3U" Gold S1:Selective 3u" G2:5u" Gold S2:Selective 5u" G3:10u" Gold S3:Selective 10u" G4:15u" Gold S4:Selective 15u" G5:30u" Gold S5:Selective 30u" SN:Tin
- ④ Connector Type: S:Single
- ⑤ Plastic High: H:5.7
- ⑥ Insulator Material: A:PBT B:PA6T C:LCP D:PA46 E:PA9T
- ⑦ Packing: A:Tray B:Bag T:Tube U:Tube+CAP R:Tape&Reel W:Tape&Reel+CAP

Please mark the desired length in the H



PCB LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW YG ZHONG DATE 01/05/2016
 CHECK BobYang DATE 01/05/2016

TITLE:
 2.54mm Female Header Single Row Angle Type



DRAWING NO: FHER02-XXSXXX
 PRODUCT NO: FHER02-XXSXXX

REV	DESCRIPTION	DATE