


HSF



RoHS

A

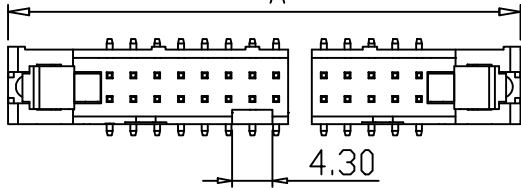

CONTACTS	10 pin	12 pin	14 pin	16 pin	20 pin	24 pin
A	31.90	34.60	36.98	39.52	44.60	49.68
B	10.16	12.70	15.24	17.78	22.86	27.94
C	18.00	20.54	23.08	25.62	30.70	35.78
CONTACTS	26 pin	30 pin	34 pin	40 pin	50 pin	
A	52.15	57.40	62.38	70.00	82.70	
B	30.48	35.56	40.64	48.26	60.96	
C	38.32	43.40	48.48	56.10	68.80	


SPECIFICATION

Current Rating:	3.0Amp
Voltage Rating:	350V
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	1000V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Latch Material:	Zinc Alloy
Latch plating:	Ni
Insulator Material:	PA6T+30%GF UL 94V-0



Ordering Code:

LHDM03 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

- Series No:
- No. of Contacts
06 08 10 12
14 16 18 20
24 26 30 34
40 50 60 64
- Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin
- Color Insulator
B:Black
U:Blue
G:Grey
- Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
- Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

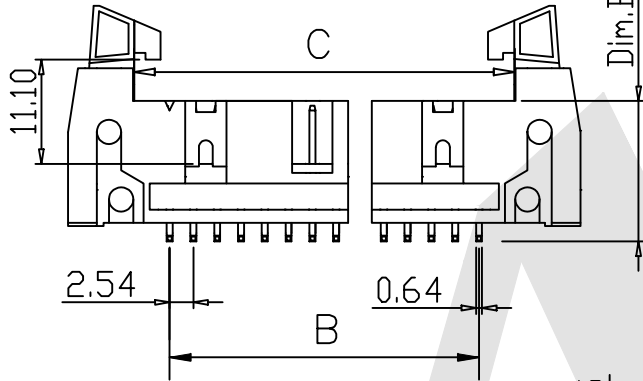

Dim.A 10.30

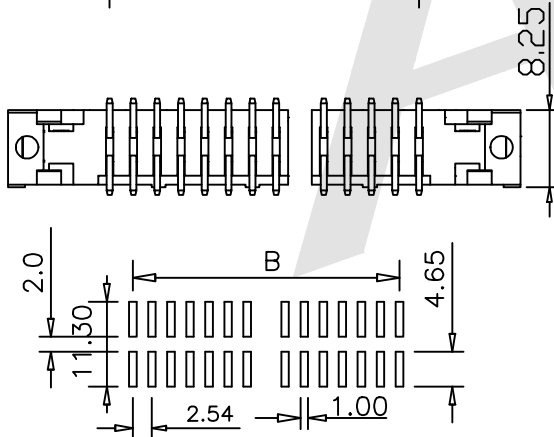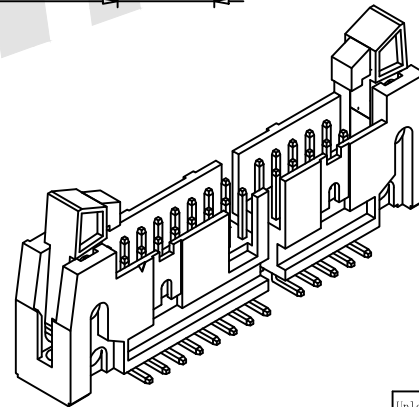

Recommended P.C.B Layout (Top Side)

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

YG ZHONG

CHECK

BobYang

DATE

01/05/2016

DATE

01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.54mm Ejector Header SMT With Special Short Latch

DRAWING NO:

LHDM03-XXXX

PRODUCT NO:

LHDM03-XXXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		