




W1=2.54mm
W2=5.08mm
W3=7.62mm
W4=15.24mm

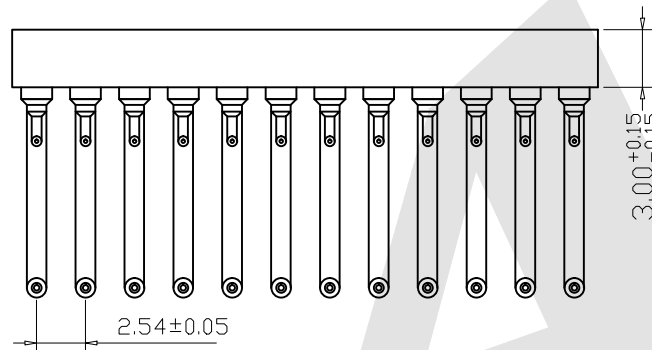

Dimension& Ordering Information

Type	NO. of Poles	Dimension				Type	NO. of Poles	Dimension			
		A	B	C	D			A	B	C	D
A1	06	7.62	5.08	7.62	10.16	A14	28	35.56	33.02	10.16	12.7
A2	08	10.16	7.62	7.62	10.16	A15	24	30.48	27.94	15.24	17.78
A3	10	12.70	10.16	7.62	10.16	A16	28	35.56	33.02	15.24	17.78
A4	14	17.78	15.24	7.62	10.16	A17	32	40.64	38.10	15.24	17.78
A5	16	20.32	17.78	7.62	10.16	A18	36	45.72	43.18	15.24	17.78
A6	18	22.86	20.32	7.62	10.16	A19	40	50.80	48.26	15.24	17.78
A7	20	25.40	22.86	7.62	10.16	A20	42	53.34	50.80	15.24	17.78
A8	24	30.48	27.94	7.62	10.16	A21	48	60.96	58.42	15.24	17.78
A9	28	35.56	33.02	7.62	10.16	A22	50	63.50	60.96	15.24	17.78
A10	16	20.32	17.78	10.16	12.7	A23	52	66.04	63.50	15.24	17.78
A11	20	25.40	22.86	10.16	12.7	A24	50	63.50	60.96	22.86	15.24
A12	22	27.94	25.40	10.16	12.7	A25	52	66.04	63.50	22.86	15.24
A13	24	30.48	27.94	10.16	12.7	A26	64	81.28	78.74	22.86	15.24

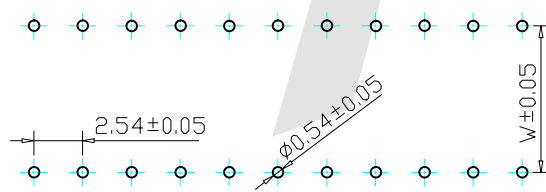


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

TECHNICAL SPECS:
Current Rating: 1.0Amp
Contact Resistance: 10MΩ max
Dielectric Strength: Min 1000 V RMS
Mechanical Life: Min 100 cycles
Operating Temperature: -40° C to +105° C
Sleeve: Brass
CuZn36Pb3 (C36000)
Contact Clip(4 finger): BeCu(C17200)
Contact Plating: Au or Sn Over Ni
Insulator Material: PPS+30%GF UL 94V-0
06p~16P Insulators without center bar
36p~52P Insulators with center two bar
64P Insulators with center three bar

Ordering Code:

MIFER01 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$

- ① Series No:
- ② Type selection
See Table
- ③ Pin Plating
S1: Tin 150"
S2: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ④ Clip Plating
S1: Tin 150"
S1: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ⑤ Packing
A: Tray C: Tube
B: Bag D: Tape Reel
- ⑥ Pin Long
TypeA: W=2.54mm
TypeB: W=5.08mm
TypeC: W=7.62mm
TypeD: W=15.24mm

Unless Otherwise specified tolerance X. ±0.35 X.XX: ±0.20 X.X: ±0.25 X.XXX: ±0.15		 ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
SCALE: As Shown	UNIT: mm	
DRAW Mo Guo Xuan	DATE 16/10/2018	TITLE: 2.54mm Dual-in-line Socket Right Angle DIP
CHECK BobYang	DATE 16/10/2018	
 3rd ANGLE PROJECTION		DRAWING NO: MIFER01-XXXXX
		PRODUCT NO: MIFER01-XXXXX

2	Change of order number	18-10-15
REV	DESCRIPTION	DATE