

HSF



1.27x2.54mm Pin Header Dual Row Double Plastic SMT Type





SPECIFICATION


Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

PHCM15 - X - X - D - A-C-D-W - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0300=3.00mm
C: 0650=6.50mm
D: 0030=0.30mm
W: 0750=7.50mm
Please mark the desired length
in the A/C/D/W
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ With locating pegs
option
A:Type A without pegs
B:Type B with pegs

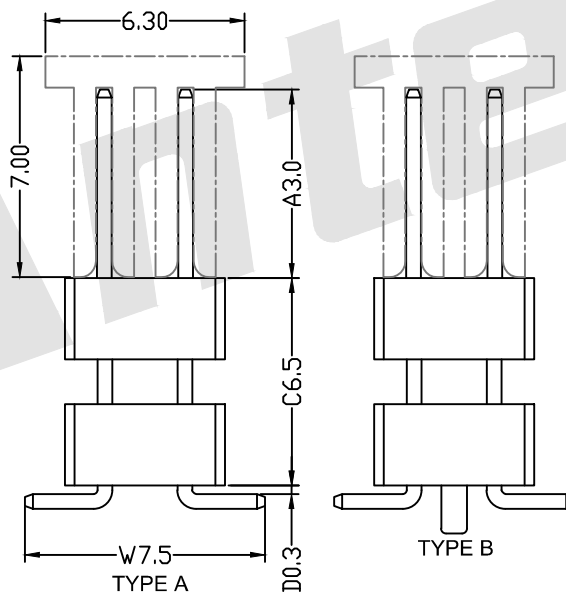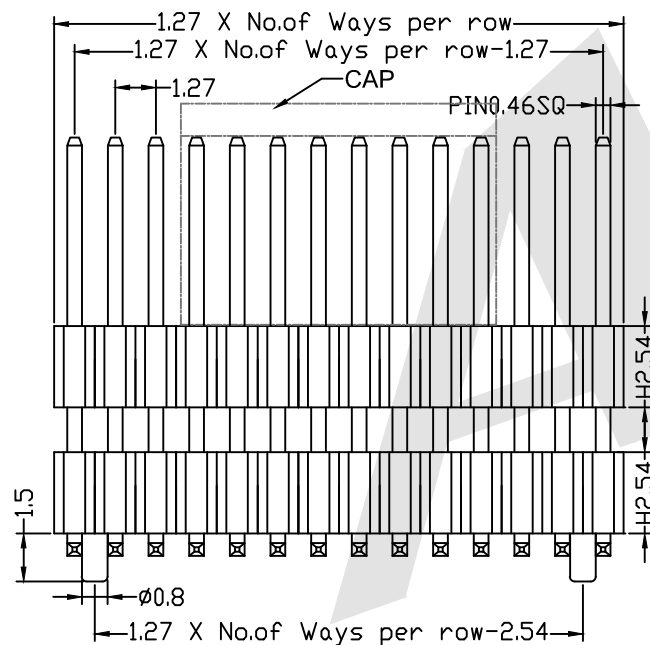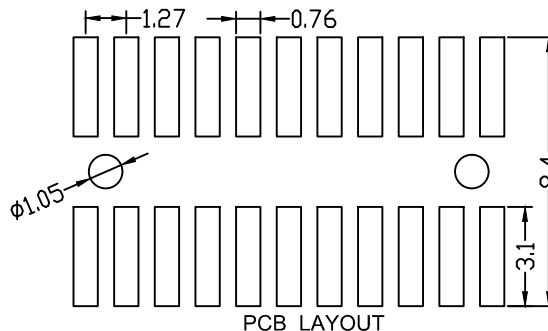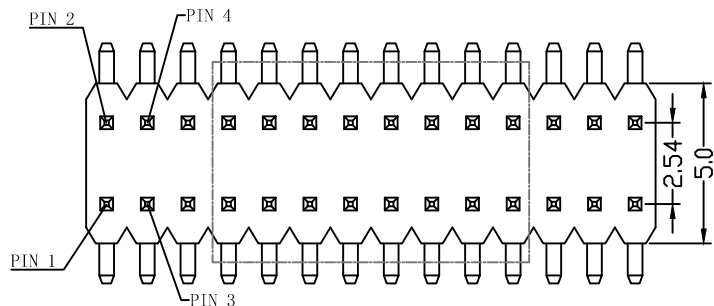

Standard IE P/N :				PHCM15-10 - G0 -D - 0300-0650-0030-0550 - B - B - A			
A	C	D	W	Unless Otherwise specified tolerance X. ±0.35 X.XX: ±0.20 X.X: ±0.25 X.XXX: ±0.15			
3.0	6.5	0.3	7.5				
Optional				SCALE: As Shown	UNIT: mm		
				DRAW YG ZHONG	DATE 12/11/2015		
				CHECK BobYang	DATE 12/11/2015		
2016/10/25				 3rd ANGLE PROJECTION			
DATE							
				TITLE: 1.27X2.54mm Pin Header Dual Row Double Plastic SMT Type			
				DRAWING NO: PHCM15-XXD- 0300-0650-0030-0550 - XXX			
				PRODUCT NO: PHCM15-XXD- 0300-0650-0030-0550 - XXX			