
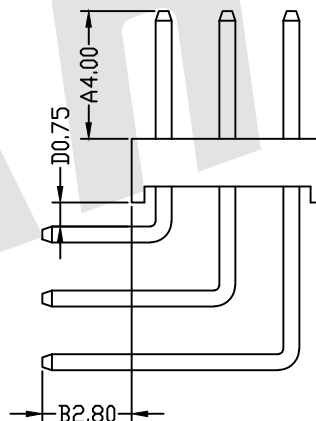
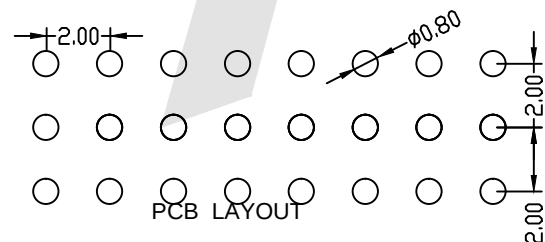
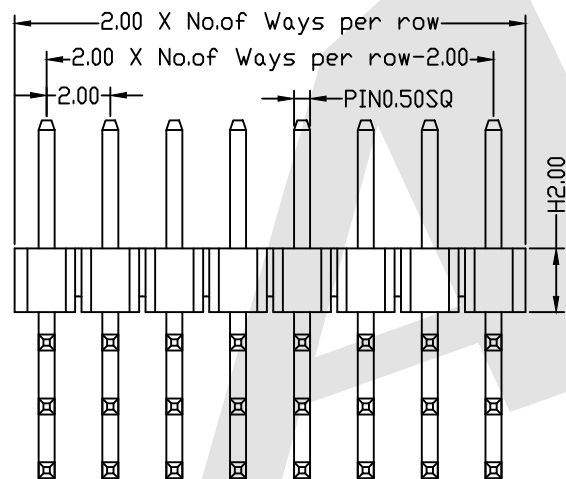


HSF

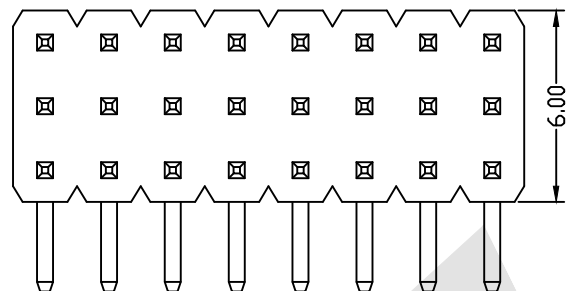

SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDR08 - X - X - T - A - D - B - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
03 To 120

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"

SN: Tin

④ Connector Type
T: Three

⑤ Pin Length:

A:0400=4.00mm

D:0075=0.75mm

B:0280=2.80mm

Please mark the desired length in the A/D/B

⑥ Insulator Material

A:PBT

B:PA6T

C:LCP

D:PA46

E:PA9T

⑦ Packing:

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

Standard IE P/N :

PHDR08-10-G0-T-0400-0075-0280-B-B

A	D	B	Unless Otherwise specified tolerance	
4.00	0.75	2.80	X. XX: ±0.35	X. XX: ±0.20
			X. X: ±0.25	X. XXX: ±0.15

Optional		SCALE:	UNIT:
		As Shown	mm
DRAW	YG ZHONG	DATE	01/05/2016
CHECK	BobYang	DATE	01/05/2016



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.00mm Pin Header Three Row Angle Type

DRAWING NO: PHDR08-XXT-0400-0075-0280-XX

PRODUCT NO: PHDR08-XXT-0400-0075-0280-XX



3rd ANGLE PROJECTION

Increase packing method and material

2016/10/25

DATE

REV

DESCRIPTION