

HSF



RoHS





SPECIFICATION

Current Rating:	1.5 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

PHDU02 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{A}{4}$ - $\frac{D}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$

- ① Series No:
② No. of Contacts
02 To 80
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D:Dual
⑤ Pin Length:
A:0280=2.80mm
D:0075=0.75mm
Please mark the desired length in the A/D
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High
H1:1.5mm
H2:2.0mm

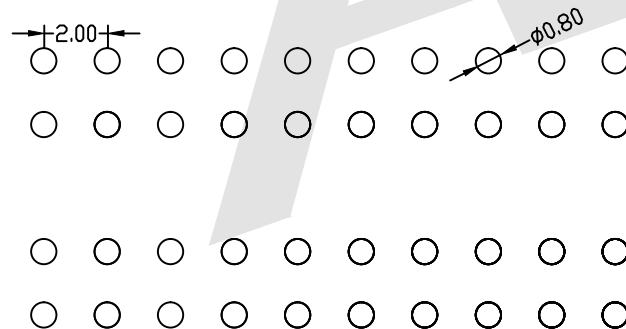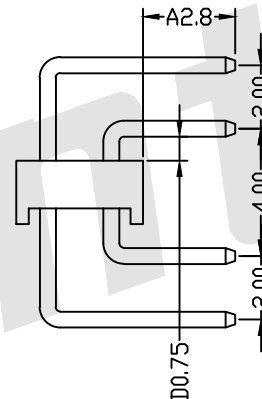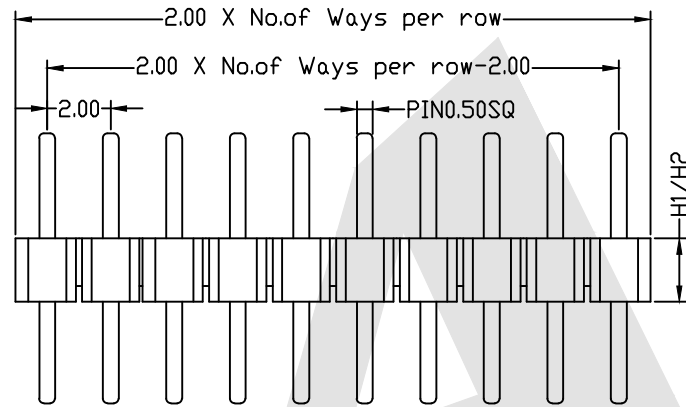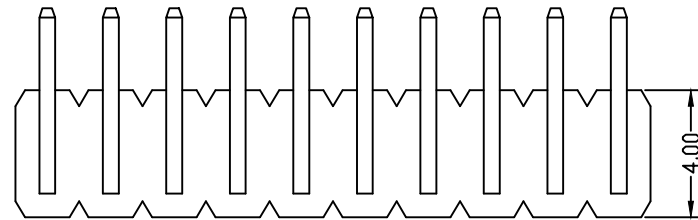


PCB LAYOUT

Standard IE P/N : PHDU02-10-G0-D-0280-0075-B-B-H1

A	D	Unless Otherwise specified tolerance	
2.80	0.75	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional	SCALE: As Shown	UNIT: mm	

DRAW
YG ZHONG
DATE
01/05/2016

CHECK
BobYang
DATE
01/05/2016



3rd ANGLE PROJECTION

Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.00mm Pin Header Dual Row U Type

DRAWING NO: PHDU02-XXD-0280-0075-XXX

PRODUCT NO: PHDU02-XXD-0280-0075-XXX

Increase packing method and material

2016/10/25

DATE

REV DESCRIPTION