

HSF



SPECIFICATION




Current Rating: 3 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHEU03 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{A-D}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$

- ① Series No:
② No. of Contacts: 02 To 80
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type:
D: Dual
⑤ Pin Length:
A: 0300=3.00mm
D: 0120=1.20mm
Please mark the desired length in the A/D
- ⑥ Insulator Material:
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High:
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm

PCB LAYOUT

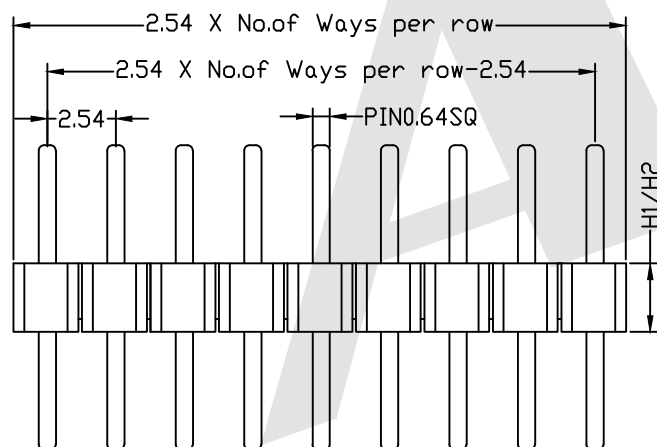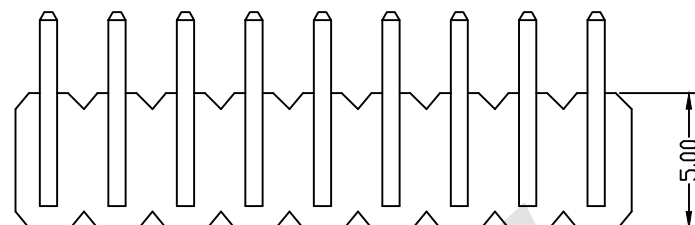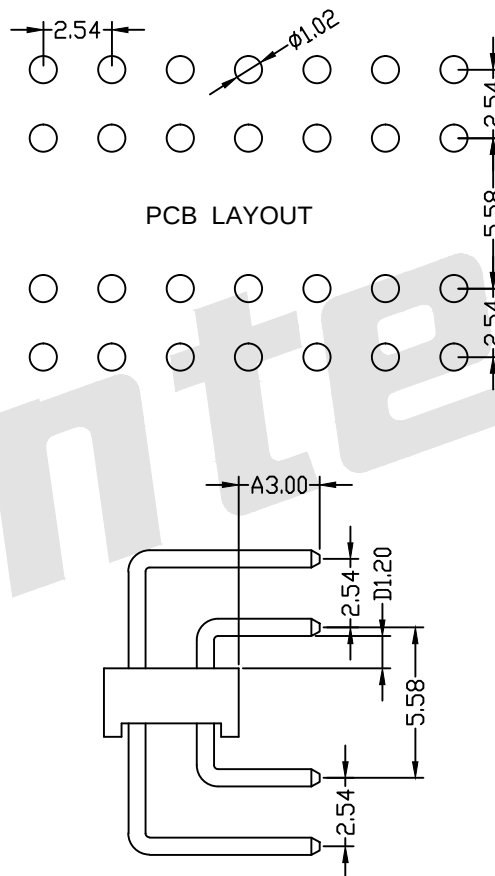

Standard IE P/N :

PHEU03-10-G0-D-0300-0120-A-B-H1

A	D	Unless Otherwise specified tolerance	
3.0	1.2	X. XX: ±0.20	X. XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm

DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.54mm Pin Header Dual Row U Type

DRAWING NO: PHEU03-XXD-0300-0120-XXX

PRODUCT NO: PHEU03-XXD-0300-0120-XXX

Increase packing method and material

2016/10/25

DATE

DESCRIPTION

REV