


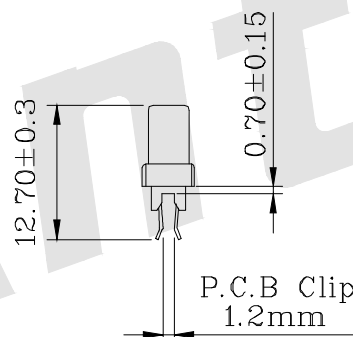


HSF

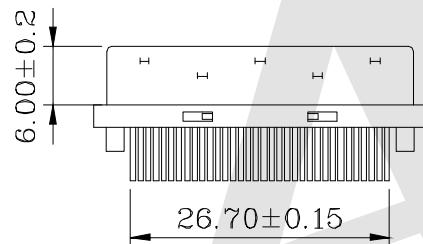

RoHS

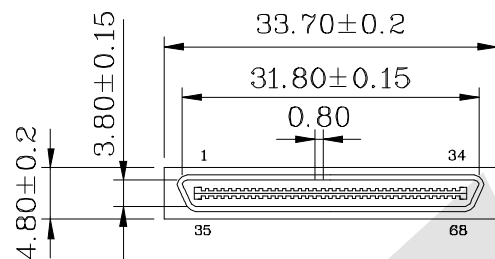

Detail A Scale 1.5:1

SPECIFICATIONS:

- Electrical Characteristics:
 - Contact Current Rate: 0.5AMP
 - Insulation Resistance: 500MΩ Minimum
 - Contact Resistance: 35MΩ Maximum
 - Dielectric Voltage: 250V AC For One Minute
 - Operation Temperature: -55° C To +105° C
- Material:
 - Insulator: PBT UL94V-0 Black
 - Contact: Phosphor Bronze, Gold Selective Plated
 - Shell: Steel Nickel Plated Over Copper


Ordering Code:

VHDCIS - M - 68 - X
① ② ③ ④

- | | |
|----------------------------|--|
| ① Series No: | ③ Contact NO.:
68=68P |
| ② Contact Type:
M: Male | ④ Contact Plating:
S0: Gold Flash Selective Plating
S2: 5u" Gold Selective Plating
S4: 15u" Gold Selective Plating
S5: 30u" Gold Selective Plating |

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 9/18/2018
CHECK Bob Yang	DATE 9/18/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
0.8mm Series 68P For PCB Clip Molded Type

DRAWING NO: VHDCIS-M68X

PRODUCT NO: VHDCIS-M68X

REV

DESCRIPTION

DATE